

NL MA-2 LOCK ADAPTER PLATE




GENERAL

The MA-2 Adapter Plate allows NL Lock Premier series keypads to be mounted on containers with vertical dial ring mounting screw holes (at 12 & 6 o'clock). The Premier II keypad with battery drawer does not require the use of this kit, as it can be mounted to either vertically or horizontally oriented mounting studs.

MOUNTING INSTRUCTIONS

Attach the plate to the container using included screws in the elongated holes at 12 & 6 o'clock, centering the plate on the spindle hole through the door. Screw NL mounting studs (included with keypad) in at 9 & 3 o'clock positions. Feed the keypad cable thru the spindle hole. Align keypad mounting holes with studs and push down until you hear a "click." Proceed according to chosen lock Installation Instructions.

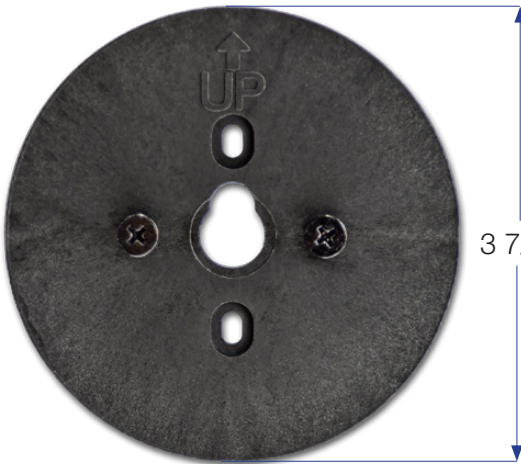

3 7/8"

3/16" Thick

2-#8-32
Screws Supplied

Works With:



Premier
P120•xx



Premier Dallas
P180•xx



Premier Vision
TE20•xx



To view our full line of products, Warranty and other Instruction Manuals

